

Photo Transistor --ORT-PT3125H1

1. Scope:

- This specification applies to NPN Photo Transistor.

2. Structure:

- Top Side : aluminium alloy
- Bottom Side : silver alloy
- Passivation : Silicon Nitride

3. Size:

- Die Size : $(610\mu\text{m}\times 610\mu\text{m})\pm 40\mu\text{m}$
- Thickness : $220\mu\text{m}\pm 30\mu\text{m}$
- Pad Size :
- Base : $70\mu\text{m}\times 70\mu\text{m}\pm 20\mu\text{m}$
- Emitter : $\Phi 85\mu\text{m}\pm 20\mu\text{m}$
- Active Area : $432\mu\text{m}\times 432\mu\text{m}\pm 20\mu\text{m}$
- Pattern Drawing: fig.1.

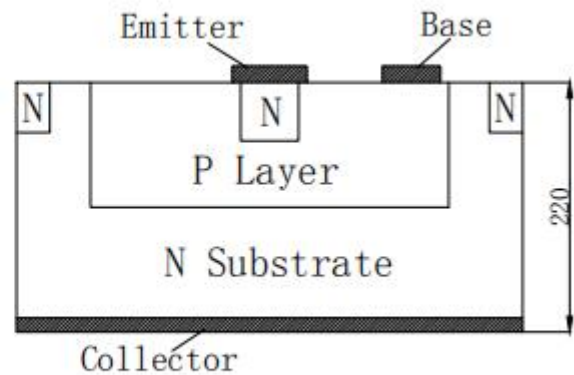
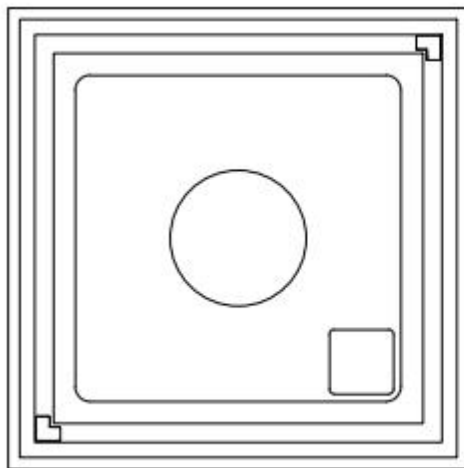


fig.1

4. Electro-Optical Characteristics:

($T_a=+25^\circ\text{C}$)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
C-E Leakage Current	I_{CEO}	$V_{CE}=20\text{V}$ $H=0\text{mw}/\text{cm}^2$			100	nA
C-E Saturation Voltage	V_{CES}	$I_C=5\text{mA}$, $I_B=1\text{mA}$			250	mV
C-E Voltage	BV_{CEO}	$I_{CE}=500\mu\text{A}$	70			V
E-C Voltage	BV_{ECO}	$I_{EC}=50\mu\text{A}$	6			V
DC Current Gain	h_{FE}	$V_{CE}=10\text{V}$, $I_C=1\text{mA}$	300			-

***Note** : BV_{ECO} : h_{FE} : 1000- (BV_{ECO} = Min. 3V)



5. hfe Classification:

PT3125H13 series(1:1.3)

Classification	PT3125H1-3A	PT3125H1-3B	PT3125H1-3C	PT3125H1-3D	PT3125H1-3E
hfe	600-780	660-860	720-940	780-1020	840-1100

Classification	PT3125H1-3F	PT3125H1-3G	PT3125H1-3H	PT3125H1-3I	PT3125H13J
hfe	900-1180	960-1260	1020-1340	1080-1420	1140-1500

Classification	PT3125H1-3K	PT3125H1-3L	PT3125H1-3M	PT3125H1-3N
hfe	1200-1580	1500-2000	2000-2600	2400-3000

PT3125H15 series(1:1.5)

Classification	PT3125H1-5A	PT3125H1-5B	PT3125H1-5C	PT3125H1-5D	PT3125H1-5E
hfe	600-900	700-1050	800-1300	900-1400	1100-1700

Classification	PT3125H1-5F	PT3125H1-5G	PT3125H1-5H
hfe	1300-2000	1500-2300	2000-3000

PT3125H17 series(1:1.7)

Classification	PT3125H1-7A	PT3125H1-7B	PT3125H1-7C	PT3125H1-7D	PT3125H1-7E
hfe	600-1020	680-1160	760-1300	840-1440	920-1580

Classification	PT3125H1-7F	PT3125H1-7G	PT3125H1-7H
hfe	1000-1700	1200-2000	1800-3000

PT3125H1A series(1:2)

Classification	PT3125H1-AA	PT3125H1-AB	PT3125H1-AC	PT3125H1-AD	PT3125H1-AE	PT3125H1-AO
hfe	600-1200	800-1600	1000-2000	1200-2400	2000-3000	600-3000

6. Packing :

- Packing: Sheet Type

7. Application Notes:

- All data are measured by Orient' s tester on bare chips within 98% of the nominal value.